
SSR WINDSCREEN ASSEMBLY

Step 1. Before starting installation of your windscreen, the retractable top must be fully lowered and the seats moved forward.

Step 2. Remove the windscreen from the zippered storage bag.

Step 3. Locate the seat back bumpers behind the passenger seat and driver's seat (see fig.1)

Step 4. Remove protective caps from seat back bumpers and expose the fixing screw heads (see fig.1)

Step 5. Using a 10 mm socket, loosen the seat back bumper attachment nuts. 2 per seat back bumper. You do not have to remove them completely.

Step 6. With the seat back bumpers loosened, slide the windscreen mounting brackets behind the seat back bumpers as shown. (see fig .2)

Step 7. Tighten the nuts back up to 6.0 +/- 1 Nm.

Note 1: when the windscreen is properly installed, the retractable top is fully operational.

Note 2: When the windscreen is not in use, reverse the installation instructions and place it in the storage bag.

Note 3: Vehicles built before 6/1/2004 may require new seat back bumpers that have a beveled notch to allow the correct positioning of the windscreen brackets. (see fig.1)

FIG .1.

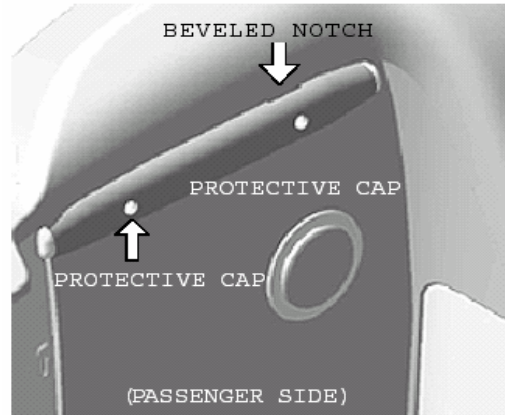


FIG.2.

